



PACKWAY INC.

緯華企業股份有限公司

緯華用心 精緻創新



We pack your way

Sealing Machine Series



ISO 9001
FM57756



台灣精品
TAIWAN EXCELLENCE



Packway Tape Heads

Packway patent tape heads featured with adjustable tension spring for four levels according to user's preference. Moreover, the one-way bearing allows smooth sealing finish

C-3



- 1.5" or 2" use with 30 mm overlap
- For PW-562M only.

C-1



- 2" or 3" use with 60±5 or 40±5 mm overlap
- 70±5 and 90±5 mm available up on request.

C-6



- 2" or 3" use with 60±5 mm overlap
- For PW-542S only.

Carton Erecting Reference Table

Model	Sealing Range (mm)				Loading Weight (Kgs)	Working Table Height (mm)
	OPP	L	W	H		
PW-563BE	n/a	250 ~ 500	200 ~ 500	150 ~ 500	20	600 ~ 900
PW-563P	n/a	250 ~ 500	200 ~ 400	100 ~ 500	20	671~871
PW-568ERT-ML	2"	250 ~ 510	200 ~ 380	120 ~ 500	n/a	615
	3"					




Sealing Range Reference Table

Model	Sealing Range (mm)				Loading Weight (Kgs)	Working Table Height (mm)
	OPP	L	W	H		
PW-551TB	2"	150 ~ ∞	200 ~ 500	120 ~ 500	30	570 ~ 810
	3"	150 ~ ∞	225 ~ 500	120 ~ 500		
PW-552TB	2"	150 ~ ∞	200 ~ 500	120 ~ 500	30	720 ~ 810
	3"	150 ~ ∞	225 ~ 500	120 ~ 500		
PW-553S	2"	150 ~ ∞	120 ~ 500	85 ~ 500	30	550 ~ 810
	3"	150 ~ ∞	145 ~ 500	85 ~ 500		
PW-553SC	2"	150 ~ ∞	145 ~ 500	120 ~ 500	20	550 ~ 750
	3"	150 ~ ∞	145 ~ 500	120 ~ 500		
PW-554TS	2"	150 ~ ∞	200 ~ 500	120 ~ 500	50	550 ~ 810
	3"	150 ~ ∞	225 ~ 500	120 ~ 500		
PW-542S	2"	150 ~ ∞	120 ~ 500	110 ~ 500	30	560 ~ 760
	3"	150 ~ ∞	145 ~ 500	110 ~ 500		
PW-570	2"	150 ~ ∞	200 ~ 600	130 ~ 400	30	600 ~ 810
	3"	150 ~ ∞	225 ~ 600	130 ~ 400		
PW-562M	1.5"	120 ~ ∞	80 ~ 200	50 ~ 300	20	670 ~ 810
	2"	120 ~ ∞	100 ~ 200	50 ~ 300	20	670 ~ 810
PW-553SF	2"	250 ~ 500	250 ~ 500	85 ~ 500	30	550 ~ 810
	3"					
PW-553SFTB	2"	250 ~ 500	250 ~ 500	150 ~ 500	30	550 ~ 810
	3"					
PW-557F	2"	200 ~ 600	120 ~ 500	110 ~ 500	30	550 ~ 810
	3"	200 ~ 600	145 ~ 500	110 ~ 500		
PW-558F	2"	200 ~ 550	200 ~ 500	120 ~ 500	50	550 ~ 810
	3"	200 ~ 550	225 ~ 500	120 ~ 500		
PW-555AU	2"	300 ~ ∞	120 ~ 500	150 ~ 500	30	550 ~ 810
	3"	300 ~ ∞	145 ~ 500	150 ~ 500		
PW-555AUC	2"	300 ~ ∞	120 ~ 500	150 ~ 500	30	550 ~ 810
	3"	300 ~ ∞	145 ~ 500	150 ~ 500		
PW-556AU	2"	300 ~ ∞	200 ~ 500	150 ~ 500	50	550 ~ 810
	3"	300 ~ ∞	225 ~ 500	150 ~ 500		
PW-559AF	2"	300 ~ 500	200 ~ 500	160 ~ 500	30	550 ~ 810
	3"					
PW-569SAF	2"	300 ~ 500	200 ~ 400	160 ~ 500	30	650 ~ 820
	3"					
PW-566EG	3"	300 ~ 600	250 ~ 500	140 ~ 500	30	630 ~ 870
PW-566AEG	3"	300 ~ 700	250 ~ 500	150 ~ 500	40	670 ~ 830
PW-553SB (Manual Sizing)	2"	300 ~ 700	120 ~ 500	110 ~ 500	30	550 ~ 810
	3"	300 ~ 700	145 ~ 500	110 ~ 500		
PW-555AB (Random Sizing)	2"	300 ~ 700	120 ~ 500	150 ~ 500	30	550 ~ 810
	3"	300 ~ 700	145 ~ 500	150 ~ 500		

*Specifications subject to change without notice.

Carton Erectors

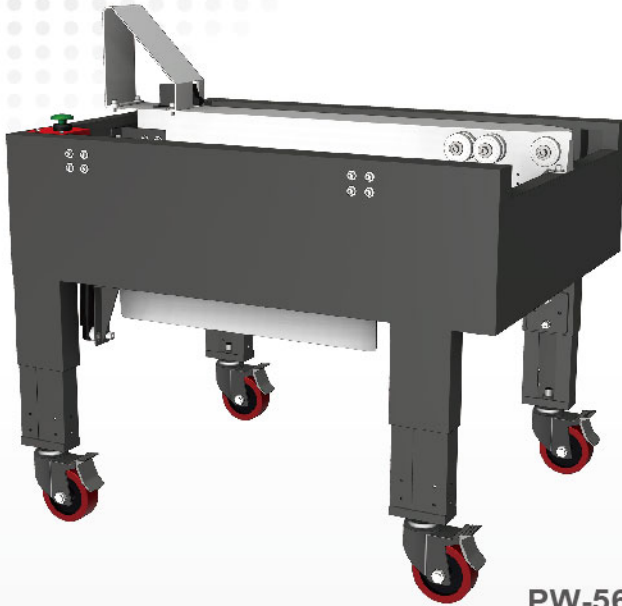

PW-563BE


PW-563BE Box Folding Pack Station

BE: Basic and Economic

Power	Pneumatic drive, requirement 6kgf/cm ² (137.64L/min.)
Folding Size	L250~500 x W200~500 x H150~500 mm
Capacity	Depends on carton positioning speed
Machine Size	L1004 x W700 x H600~900 mm

Options

- In Stainless Steel Structure #304

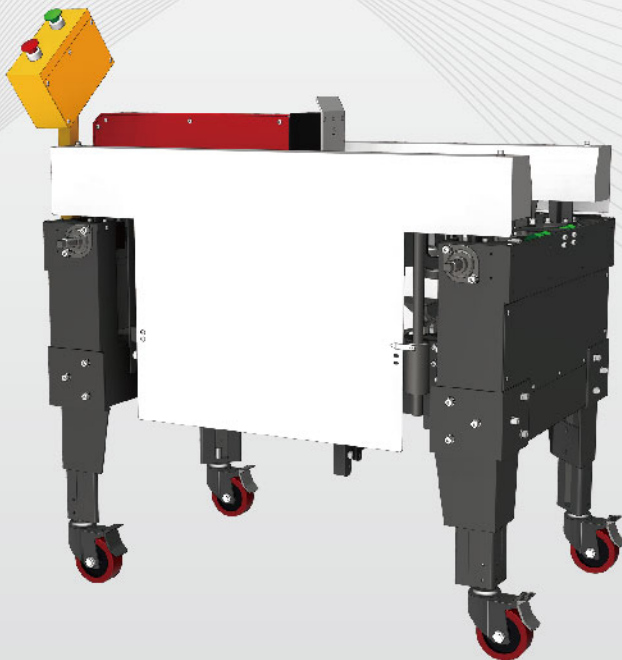

PW-563P

PW-563P Box Folding Pack Station

P: With Push Carton Device

Power	Pneumatic drive, requirement 6kgf/cm ² (137.64L/min.)
Folding Size	L250~500 x W200~400 x H100~500 mm
Capacity	Depends on carton positioning speed
Machine Size	L1117 x W862 x H1106~1306 mm

Options

- In Stainless Steel Structure #304



PW-568ERT-ML Automatic Carton Erector


ERT: Carton Erectors - Vertical Style

ML: Medium Size for Left Side Exit

Tape Width	2" or 3"
Belt Speed	20M/min.(50Hz)
Sealing Size	L250~510 x W200~380 x H120~500 mm (for 2" and 3")
Air Supply	6kgf/cm ² (137.64L/min.)
Power Supply	3Ø, 220/380/415/440V (50/60Hz)
Machine Size	L 2502 x W 2359 x H 1547 mm

Options

- In Stainless Steel Structure #304
- Right side or Left side operation.

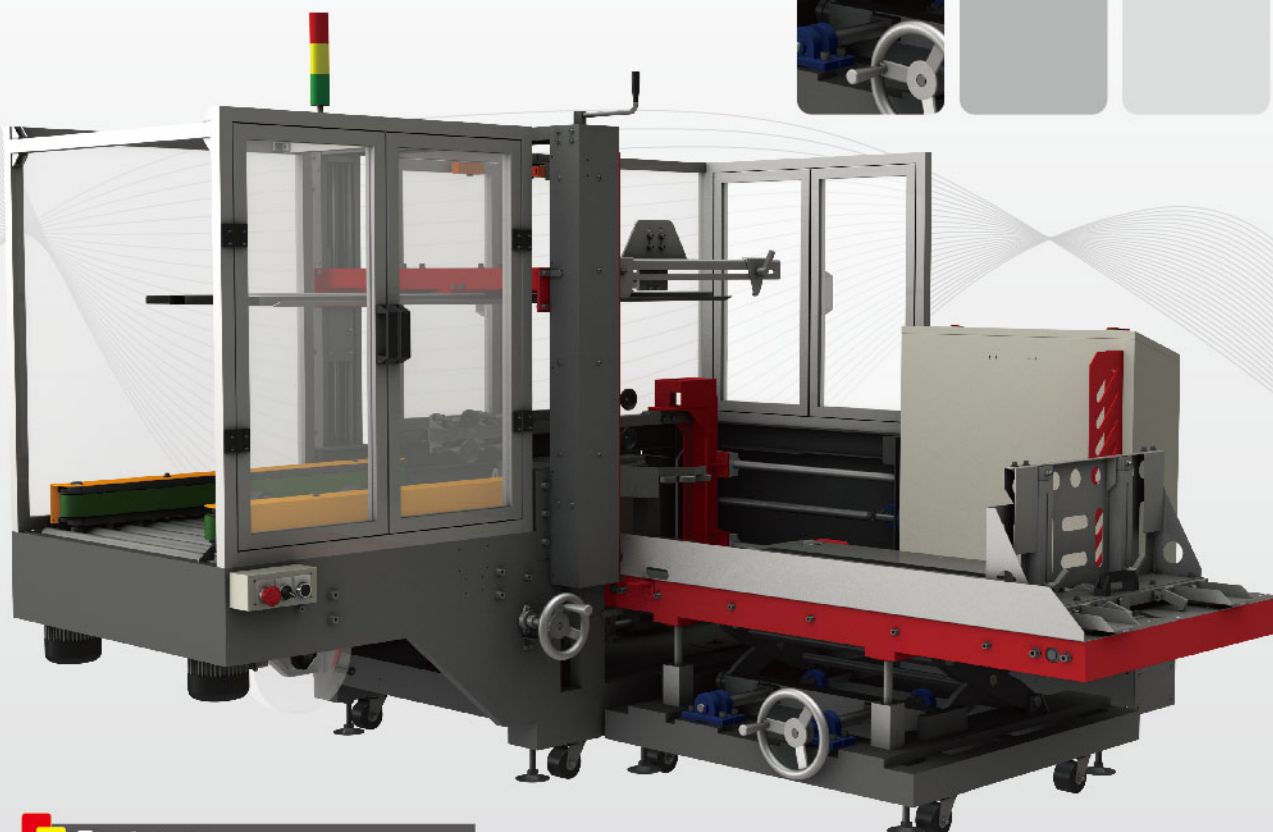


Features

- HMI Touch Panel Control System
- Equipped with detection for no tape, tape sealing failure and tape cutting failure

PW-568ERT-ML

Manual Adjustment Models

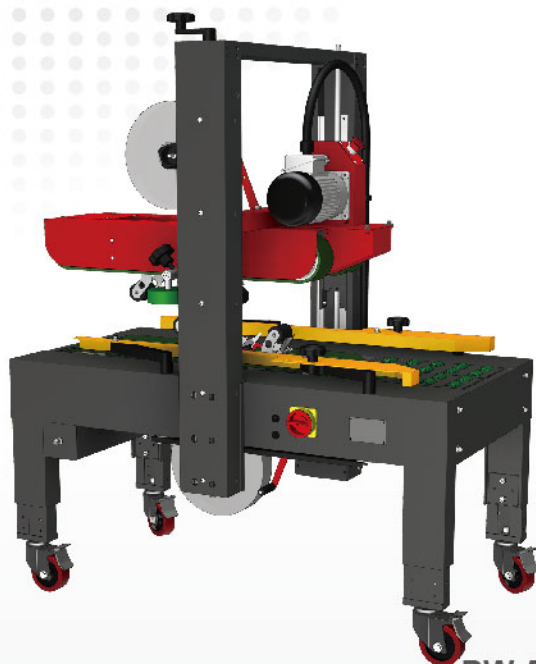

PW-551TB

PW-551TB Carton Sealer For Uniform Size Cartons

TB: Top and Bottom Belt Drive

Tape Width	2" or 3"
Belt Speed	20M/min. (approx. 30 cartons/min.)
Sealing Size	(2") L150~∞ x W200~500 x H120~500 mm (3") W +25 mm
Power Supply	1Ø, 110/220/230/240V (50/60Hz); 3Ø made on request
Machine Size	L 1200 x W 779 x H 1420~1765 mm
Operation	Table with small rollers, side guide rails adjust separately

Options

- 60 Sec. auto Stop
- Extension Roller Tables
- In Stainless Steel Structure #304
- P.C.B. control



PW-552TB

PW-552TB Carton Sealer For Uniform Size Cartons

TB: Top and Bottom Belt Drive

Tape Width	2" or 3"
Belt Speed	20M/min. (approx. 30 cartons/min.)
Sealing Size	(2") L150~∞ x W200~500 x H120~500 mm (3") W +25 mm
Power Supply	1Ø, 110/220/230/240V (50/60Hz); 3Ø made on request
Machine Size	L 1044 x W 779 x H 1569~1764 mm
Operation	Table with full belt cover, side guide rails adjust simultaneously

Options

- 60 Sec. auto Stop
- Extension Roller Tables
- In Stainless Steel Structure #304
- P.C.B. control



PW-553S


PW-553S Carton Sealer For Uniform Size Cartons

S: Side Belt Drive

Tape Width	2" or 3"
Belt Speed	20M/min. (approx. 30 cartons/min.)
Sealing Size	(2") L150~ ∞ x W120~500 x H85~500 mm (3") W +25 mm
Power Supply	1Ø, 110/220/230/240V (50/60Hz); 3Ø made on request
Machine Size	L 1280 x W 964 x H 1396~1761 mm

Options

- 60 Sec. auto Stop
- Extension Roller Tables
- In Stainless Steel Structure #304
- P.C.B. control

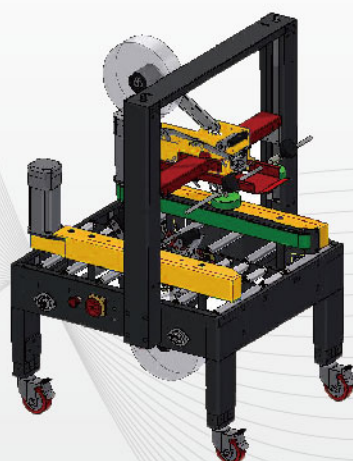

PW-553SC


PW-553SC Carton Sealer For Uniform Size Cartons

S : Side belt drive ; C : Competitive

Tape Width	2" or 3"
Belt Speed	20M/min. (approx. 30 cartons/min.)
Sealing Size	L150~ ∞ x W145~500 x H120~500 mm (for 2" and 3")
Power Supply	1Ø, 110/220/230/240V (50/60Hz);
Machine Size	L 830 x W 885 x H 1389~1589 mm

Options

- Extension roller L470 x W360mm

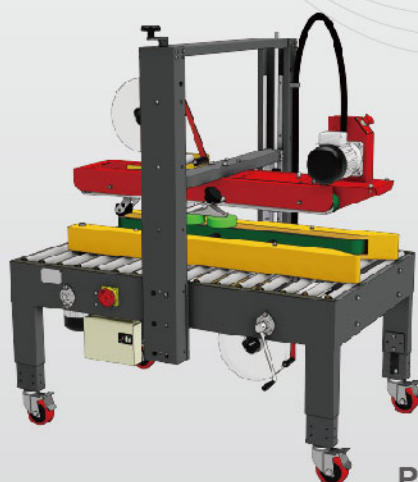

PW-554TS

PW-554TS Carton Sealer For Uniform Size Cartons


TS: Top and Side Belt Drive

Tape Width	2" or 3"
Belt Speed	20M/min. (approx. 30 cartons/min.)
Sealing Size	(2") L150~ ∞ x W200~500 x H120~500 mm (3") W +25 mm
Power Supply	1Ø, 110/220/230/240V (50/60Hz); 3Ø made on request
Machine Size	L 1280 x W 964 x H 1396~1761 mm

Options

- 60 Sec. auto Stop
- Extension Roller Tables
- In Stainless Steel Structure #304
- P.C.B. control

Manual Adjustment Models

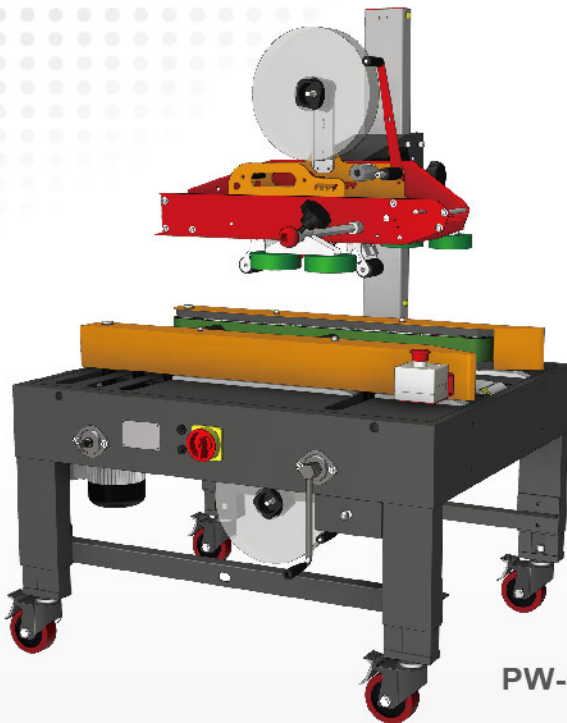

PW-542S


PW-542S Carton Sealer For Uniform Size Cartons

S: Side Belt Drive

Tape Width	2" or 3"
Belt Speed	20M/min. (approx. 30 cartons/min.)
Sealing Size	(2") L 150 ~ ∞ x W 120 ~ 500 x H 110 ~ 500 mm (3") W + 25 mm
Power Supply	1Ø, 110/220/230/240V (50/60Hz); 3Ø made on request
Machine Size	L 960 x W 943 x H 1363 ~ 1563 mm
Operation	Easy tape threading design

Options

- 60 Sec. auto Stop
- Extension Roller Tables
- In Stainless Steel Structure #304

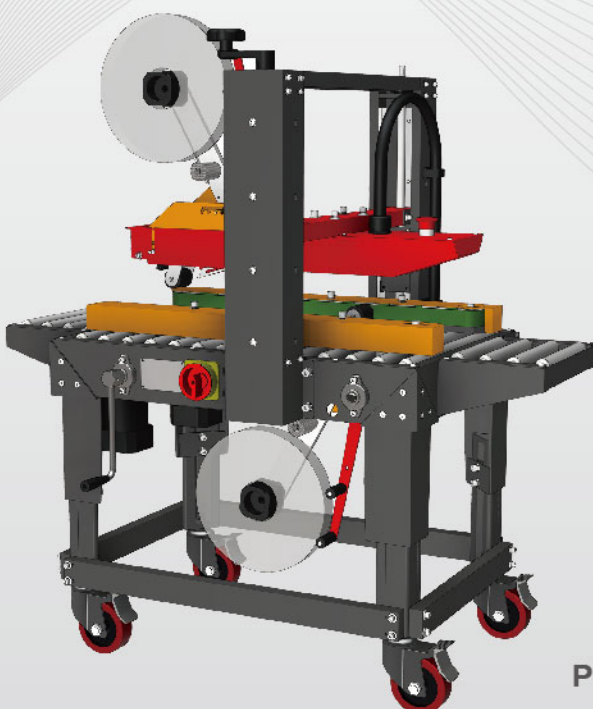

PW-562M

PW-562M Carton Sealer For Uniform Size Cartons

M: Mini Type with Side Belt Drive

Tape Width	1.5" or 2"
Belt Speed	18M/min. (approx. 25 cartons/min.)
Sealing Size	(1.5") L 120 ~ ∞ x W 80 ~ 200 x H 50 ~ 300 mm (2") W + 20 mm
Power Supply	1Ø, 110/220/230/240V (50/60Hz)
Machine Size	L 1090 x W 659 x H 1210 ~ 1350 mm

Options

- 60 Sec. auto Stop
- In Stainless Steel Structure #304



PW-570 Carton Sealer For Uniform Size Cartons

Side Seal with Top and Bottom Belt Drive



Tape Width	2" or 3"
Belt Speed	20M/min. (approx. 30 cartons/min.)
Sealing Size	(2") L150~ ∞ x W200~600 x H130~400 mm (3") H +25 mm
Power Supply	1Ø, 110/220/230/240V (50/60Hz); 3Ø made on request
Machine Size	L 915 x W 1069 x H 1341 ~ 1551 mm

Options

- 60 Sec. auto Stop
- In Stainless Steel Structure #304
- Use for random size cartons (PW-570A)


Features

- Suitable for Styrofoam box
- Top mast with cushion for smooth sealing
- Top & bottom belt driven with special bearing: Precise, Low noise, Durable parts and belt

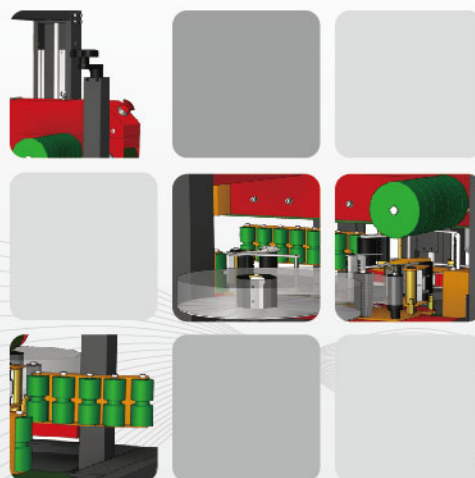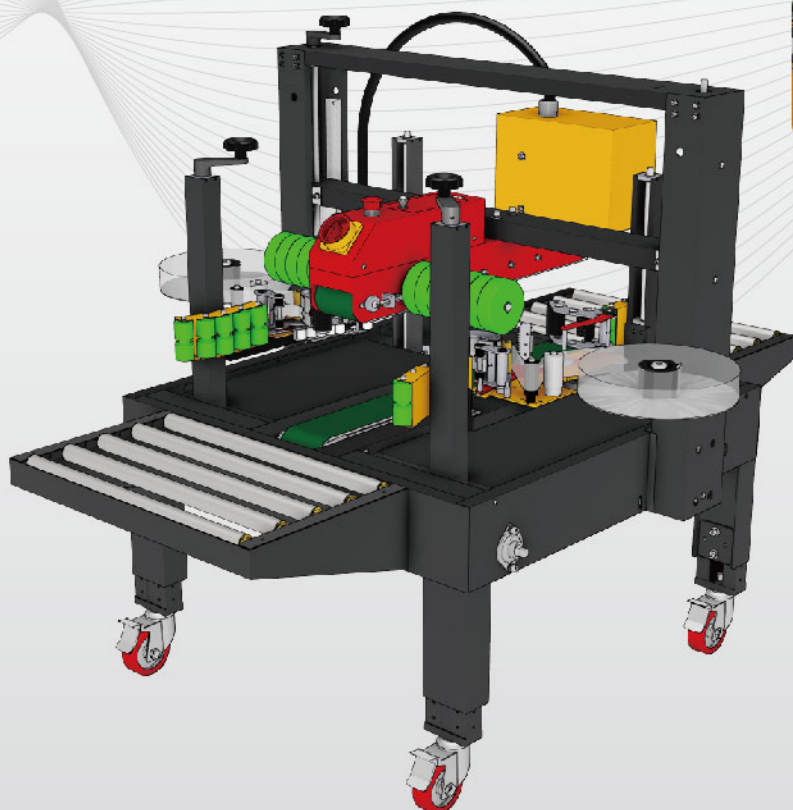

PW-570

Manual Adjustment With Side Folding Models

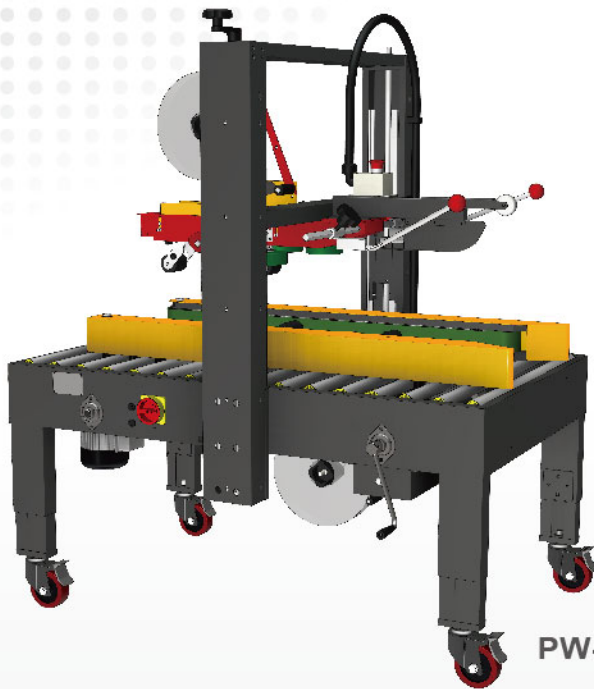

PW-553SF


PW-553SF Carton Sealer For Uniform Size Cartons

SF: Side Belt Drive with Top Flap Folding

Tape Width	2" or 3"
Belt Speed	20M/min. (approx. 15 cartons/min.)
Sealing Size	L250~500 x W250~500 x H85~500 mm (for 2"and 3")
Power Supply	1Ø, 110/220/230/240V (50/60Hz); 3Ø made on request
Machine Size	L 1280 x W 964 x H 1396 ~ 1761 mm

Options

- 60 Sec. auto Stop
- Extension Roller Tables
- In Stainless Steel Structure #304

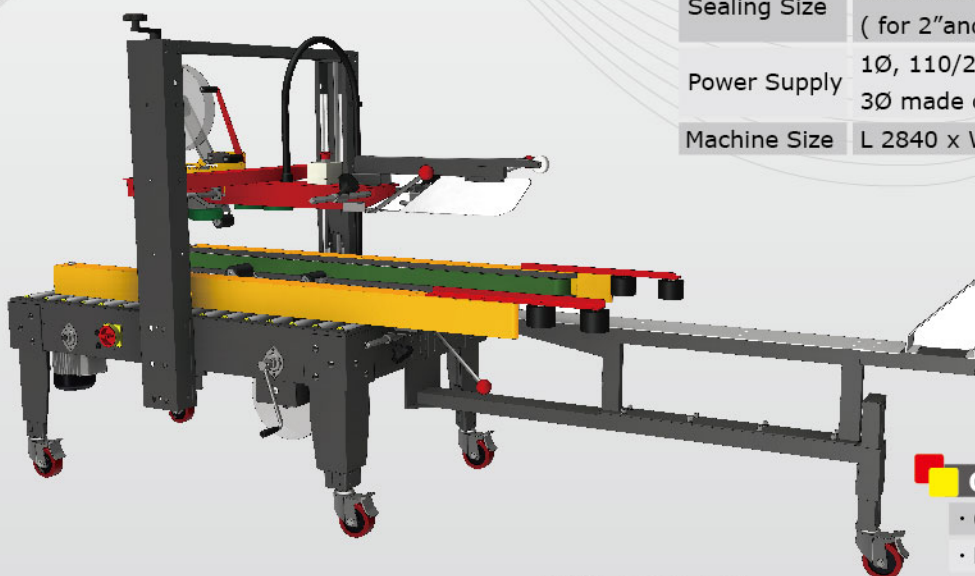

PW-553SFTB

PW-553SFTB Carton Sealer For Uniform Size Cartons

SFTB: Side Belt Drive with Top and Bottom Flap Folding

Tape Width	2" or 3"
Belt Speed	20M/min. (approx. 15 cartons/min.)
Sealing Size	L250~500 x W250~500 x H150~500 mm (for 2"and 3")
Power Supply	1Ø, 110/220/230/240V (50/60Hz); 3Ø made on request
Machine Size	L 2840 x W 964 x H 1396 ~ 1761 mm

Options

- 60 Sec. auto Stop
- Extension Roller Tables
- In Stainless Steel Structure #304



PW-557F Carton Sealer For Uniform Size Cartons

F: Automatic Top Flap Folding With Side Belt Drive


Tape Width	2" or 3"
Belt Speed	20M/min. (approx. 11 cartons/min.)
Sealing Size	(2") L200~600 x W120~500 x H110~500 mm ,(3") W +25mm
Air Supply	6kgf/cm ² (137.64L/min.)
Power Supply	1Ø, 110/220/230/240V (50/60Hz); 3Ø made on request
Machine Size	L 2086 x W 1002 x H 1551~1916 mm
Operation	With 60 sec. automatic stop function

Options

- Extension Roller Tables
- In Stainless Steel Structure #304
- Detection for no tape, tape sealing failure and tape cutting failure.



PW-557F

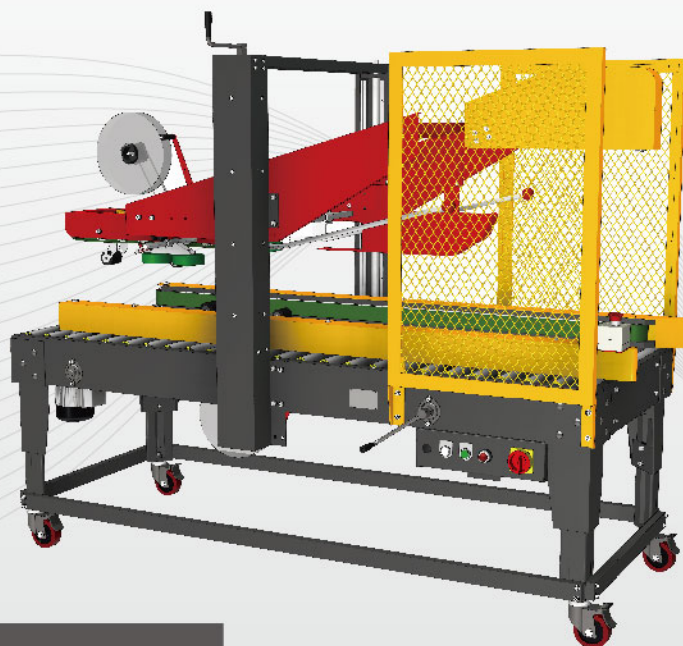

PW-558F

PW-558F Carton Sealer For Uniform Size Cartons

F: Automatic Top Flap Folding With Top and Side Belt Drive

Tape Width	2" or 3"
Belt Speed	20M/min. (approx. 11 cartons/min.)
Sealing Size	(2") L200~550 x W200~500 x H120~500 mm ,(3") W +25mm
Air Supply	6kgf/cm ² (137.64L/min.)
Power Supply	1Ø, 110/220/230/240V (50/60Hz); 3Ø made on request
Machine Size	L 2086 x W 1002 x H 1551 ~ 1916 mm
Operation	With 60 sec. Automatic Stop Function Best Suitable for Heavy or Tall/Thin Cartons

Options

- Extension Roller Tables
- In Stainless Steel Structure #304
- Detection for no tape, tape sealing failure and tape cutting failure.

Automatic Adjustment Models



PW-555AU

PW-555AU Carton Sealer For Random Size Cartons


AU: Automatic Height Search from Top

With Side Belt Drive

Tape Width	2" or 3"
Belt Speed	20M/min. (approx. 8 cartons/min.)
Sealing Size	(2") L 300 ~ ∞ x W 120 ~ 500 x H 150 ~ 500 mm (3") W +25mm
Air Supply	6kgf/cm ² (137.64L/min.)
Power Supply	1Ø, 110/220/230/240V (50/60Hz); 3Ø made on request
Machine Size	L 1319 x W 930 x H 1316 ~ 1576 mm
Operation	In Random or Height Memory Function (Adjustable)

Options

- Extension Roller Tables
- In Stainless Steel Structure #304

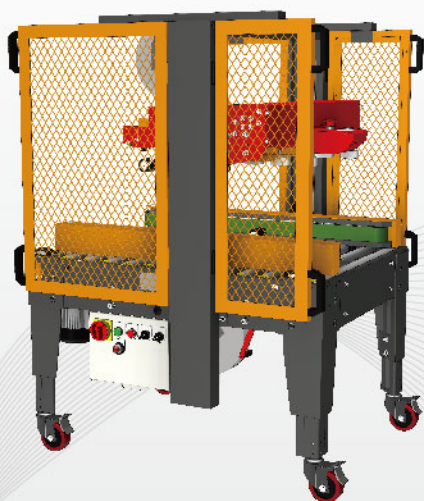

PW-555AUC

PW-555AUC Carton Sealer For Random Size Cartons

AUC: Automatic Height Search from Top with Side Compression Rollers

With Side Belt Drive

Tape Width	2" or 3"
Belt Speed	20M/min. (approx. 8 cartons/min.)
Sealing Size	(2") L300 ~ ∞ x W 120 ~ 500 x H 150 ~ 500 mm (3") W +25mm
Air Supply	6kgf/cm ² (137.64L/min.)
Power Supply	1Ø, 110/220/230/240V (50/60Hz); 3Ø made on request
Machine Size	L 1079 x W 933 x H 1316~1576 mm
Operation	In Random or Height Memory Function (Adjustable)

Options

- Extension Roller Tables
- In Stainless Steel Structure #304



PW-556AU

PW-556AU Carton Sealer For Random Size Cartons

AU: Automatic Height Search from Top

With Top and Side Belt Drive

Tape Width	2" or 3"
Belt Speed	20M/min. (approx. 8 cartons/min.)
Sealing Size	(2") L 300 ~ ∞ x W 200 ~ 500 x H 150 ~ 500 mm (3") W +25mm
Air Supply	6kgf/cm ² (137.64L/min.)
Power Supply	1Ø, 110/220/230/240V (50/60Hz); 3Ø made on request
Machine Size	L 1319 x W 933 x H 1316~1576 mm
Operation	In Random or Height Memory Function (Adjustable)

Options

- Extension Roller Tables
- In Stainless Steel Structure #304




PW-559AF Fully Automatic Carton Sealer For Random Size Cartons

AF: Fully Automatic Top Flap Folding With Side Belt Drive


Tape Width	2" or 3"
Belt Speed	20M/min. (approx. 5 cartons/min.)
Sealing Size	L300~500 x W200~500 x H160~500 mm (for 2" and 3")
Air Supply	6kgf/cm ² (137.64L/min.)
Power Supply	3Ø, 220/380/415/440V (50/60Hz)
Machine Size	L 2120 x W 1176 x H 1672~1932 mm

Options

- Extension Roller Tables
- In Stainless Steel Structure #304
- Detection for no tape, sealing failure, tape cutting failure

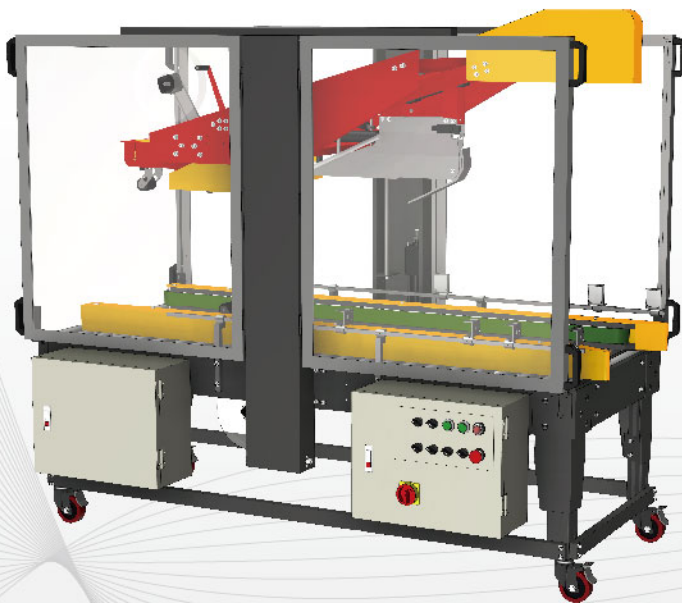

PW-559AF

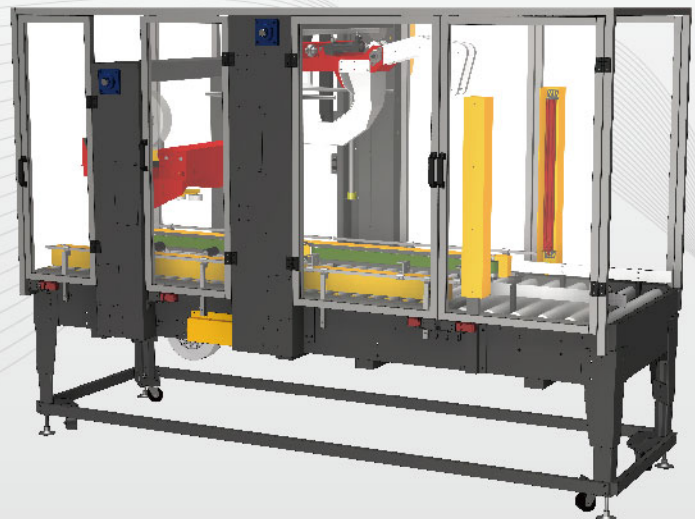

PW-569SAF

PW-569SAF Fully Automatic Carton Sealer For Random Size Cartons

SAF: Fully Automatic Top Flap Folding with Servo System for Positioning With Side Belt Drive

Tape Width	2" or 3"
Belt Speed	33M/min. (approx. 16 cartons/min.)
Sealing Size	L300~500 x W200~400 x H160~500 mm (for 2" and 3")
Air Supply	6kgf/cm ² (137.64L/min.)
Power Supply	3Ø, 220/380/415/440V (50/60Hz)
Machine Size	L 2859 x W 1306 x H 2021 mm

Operation

- HMI Touch Panel Control System
- Equipped with detection for no tape, tape sealing failure and tape cutting failure (suitable for system operation)

Edge Sealers



PW-566EG


PW-566EG Carton Edge Sealer for Uniform Size Cartons

EG: Edge Sealing with Top and Bottom Belt Drive

Tape Width	3"
Belt Speed	20M/min. (approx. 5 cartons/min.)
Sealing Size	L 300 ~ 600 x W 250 ~ 500 x H 140 ~ 500 mm
Air Supply	6kgf/cm ² (137.64L/min.)
Power Supply	3Ø, 220/380/415/440V (50/60Hz)
Machine Size	L 1500 x W 1471 x H 1593~1722 mm
Operation	Height Adjustment by Motor Driven Controls

Options

- Extension Roller Tables
- In Stainless Steel Structure #304
- Detection for no tape, sealing failure, tape cutting failure

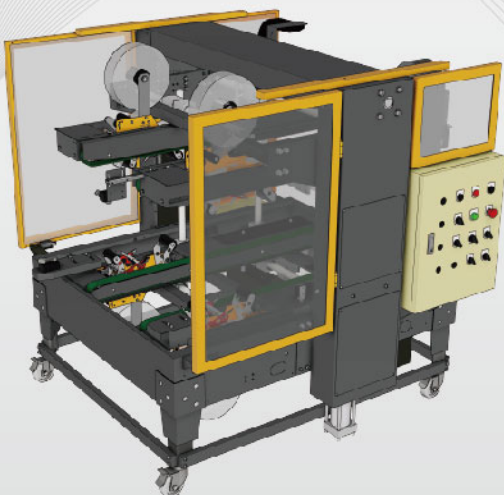

PW-566AEG


PW-566AEG Carton Edge Sealer for Random Size Cartons

AEG: Automatic Edge Sealing with Top and Bottom Belt Drive

Tape Width	3"
Belt Speed	20M/min. (approx. 4 cartons/min.)
Sealing Size	L 300 ~ 700 x W 250 ~ 500 x H 150 ~ 500 mm
Air Supply	6kgf/cm ² (137.64L/min.)
Power Supply	3Ø, 220/380/415/440V (50/60Hz)
Machine Size	L 1639 x W 1630 x H 1658~1818 mm

Options


- Extension Roller Tables
- In Stainless Steel Structure #304
- Detection for no tape, sealing failure, tape cutting failure

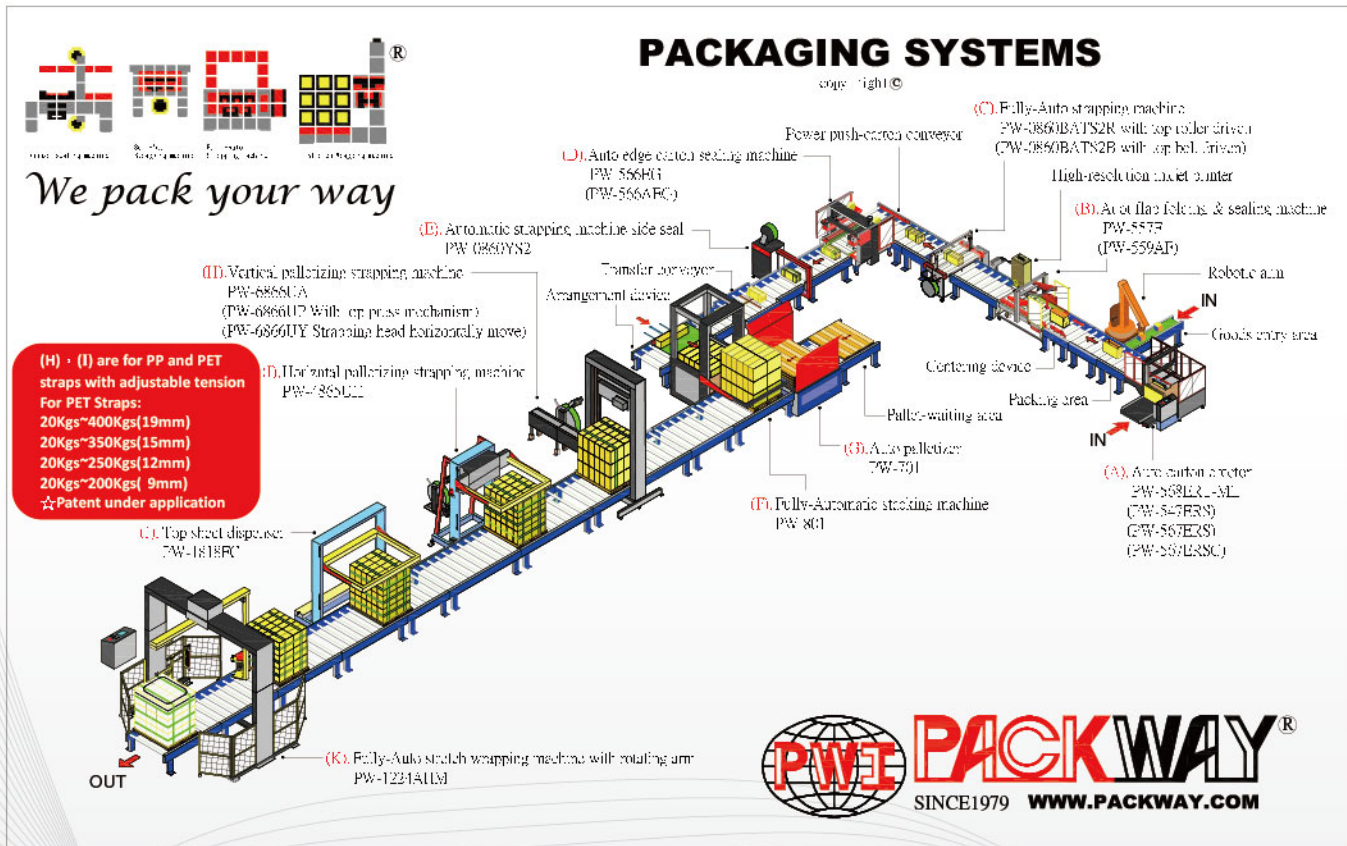

PW-0860BAT+PW-557FB+PW-53+PW-568ERT



PW-4865CLP+S6

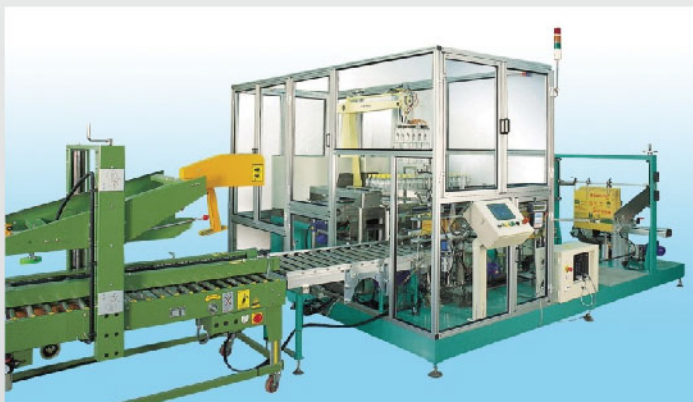

Flexible Pick & Place with Sealing System



PW-553S+PW-0840AS2+PW-801



I am from Taiwan

🏠 56, 35th Road. Taichung Industrial Park,
Taichung 40768, TAIWAN, R.O.C
☎ +886 4 2359 1858
📠 +886 4 2359 7489
🌐 www.packway.com